

Russellstoll®

Heavy Service Ever-Lok® – Accessories

Replacement Interiors

For Receptacles, Connectors, Plugs & Male Inlets

	Female Interiors: Receptacles & Connectors			Male Interiors: Plugs		
Poles/Wires	30 Amp	60 Amp	100 Amp	30 Amp	60 Amp	100 Amp
2P, 3P	ARU323	ARU623	—	APU323	APU623	—
3P, 4W	ARU334	ARU634	ARU134-6	APU334	APU634	APU134-6

Notes:

Interiors – arc-resisting composition with machined, full floating, self-aligning contacts. Solder lug interior will not interchange with mechanical lug. If you have solder lugs, reorder solder lugs.

Russellstoll®

Accessories

Adapters are tapped NPT standard pipe thread to accommodate rigid conduit or standard connectors for armored and non-metallic cable or flexible conduit.



JPA 64
Conduit
Adapter

Plug or Connector Sizes

30 Amp Cat. No.	Tapped Hole Size NPT	60 Amp Cat. No.	Tapped Hole Size NPT	100 Amp Cat. No.	Tapped Hole Size NPT
JPA31	½"	JPA62	¾"	JPA104	1¼"
JPA32	¾"	JPA63	1"	JPA105	1½"
JPA33	1"	JPA64	1¼"	JPA106	2"

Notes:

Material – cast aluminum, corrosion-resistant copper-free alloy, electrostatic epoxy coated. Furnished complete with gasket and screws.

To specify standard plugs or connectors equipped with one of the above adapters, add the catalog number of the adapter selected to the catalog number of the plug or connector. Complete list price is the list price of the device plus list price of the adapter.

Example: Cat. No. 8443 with adapter tapped 1-inch would be Cat. No. 8443/JPA33

Russellstoll®

Heavy Service Ever-Lok® – Accessories

Cable Bushings

Boxed catalog numbers are standard bushing sizes. To order non-standard bushing, specify as follows:
example 8418/JG65


Hole Diameter for Cable	30 Amp	60 Amp	100 Amp
.375"	JG31		
.500"	JG32		
.563"	JG325		
.594"	JG32B		
.625"	JG33	JG63	
.750"	JG34	JG64	JG104
.781"	JG341		
.875"	JG35	JG65	JG105
.937"	JG355		
1.000"	JG38*	JG66	JG106
1.125"	JG361*		
1.188"		JG67	JG107
1.313"			JG108
1.375"		JG69*	
1.500"		JG610*	JG1010
1.687"			JG1011
1.813"			
1.875"			JG1013*
2.000"			
2.125"			
2.250"			
2.500"			

Notes:

When ordering, select bushing size slightly larger than your cable O.D. for best fit.

Material – Neoprene

Standard Cable Bushings:

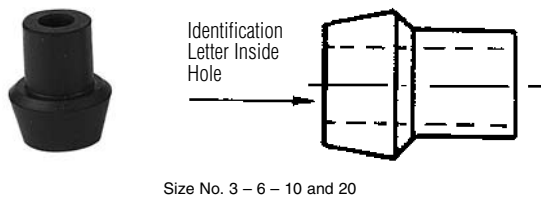

*** Oversize Cable Bushings:**

