5.625"


Ć

Æ

1-1/8" Max. Cable Dia

Russellstoll° **Control Circuits Connectors – Type SK Dimensions**


Standard Service

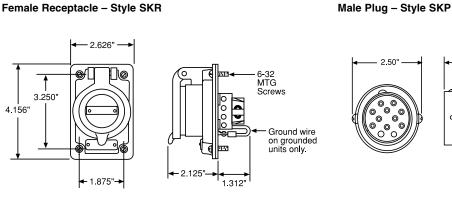

Note: All require FD or DSFD series box mounting.


Reverse Service


Male Receptacle - Style SKRR



0

2.50"





Connector

Female Connector – Style SKC (shrouded style)

