










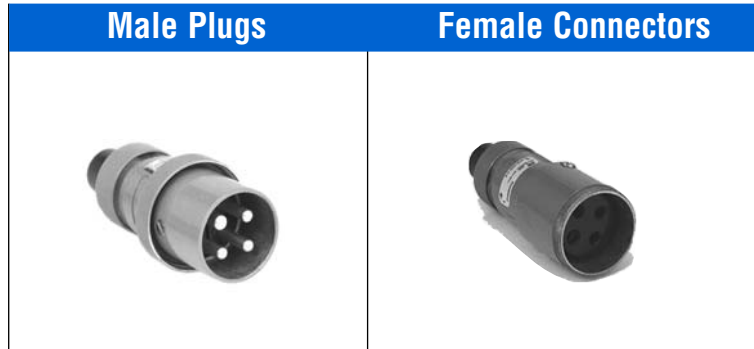


Russellstoll[®]**FS/FD™ 10-30A Metallic – Ordering Information**

Metallic Plugs, Connectors, Receptacles and Reverse Service Female Plugs/Male Inlets.
10-30A, Maximum 600 VAC/250VDC



*See also DuraGard section for Thermoplastic families.

Poles Wires	Amperes	Voltage	Polarization (Receptacle)	Aluminum	Cast Brass	Aluminum	Cast Brass
2P3W	15 A	250 V		3720U-2	3720BU-2	3913U-2	3913BU-2
		277 VAC		3720U-3	3720BU-3	3913U-3	3913BU-3
		480 VAC		3720U-4	3720BU-4	3913U-4	3913BU-4
		600 VAC		3720U-5	3720BU-5	3913U-5	3913BU-5
	20 A	250 VAC		3720	3720B	3913	3913B
		125 V		3720U-1	3720BU-1	3913U-1	3913BU-1
	30 A	250 VAC		3750	3750B	3933	3933B
	3P4W	10 A	600 VAC		3730	3730B	3914
15 A		250 VAC		3730	3730B	3914	3914B
20 A		600 VAC		3760	3760B	3934	3934B
30 A		250 VAC		3760	3760B	3934	3934B

Standard Cable Bushing Hole Diameter

Prefix	Hole Dia.	Prefix	Hole Dia.	Prefix	Hole Dia.
3720		3730		3750, 3760	
3913	5/8"	3914	1 1/16"	3933, 3934	3/4"
3789		3790		3809, 3810	

For other plug & connector accessories see pages H62 and H63 H61

Plugs can be furnished with adapters to accommodate rigid conduit or standard connectors for armored cable or flexible conduit, see page H61.



Cable Bushings – oil-resistant, neoprene cable bushing is regularly furnished with hole sizes listed above. Other hole sizes are available at no extra cost when specified on order. See page H61 for available sizes.

Screw Caps For Connectors can be furnished with retained screw cap at extra cost. For Kits order:

9X2PSC	20A Screw Cap
9X3PSC	30A Screw Cap
F26874C	30A Plug Cup Cap

Russellstoll[®]**FS/FD™ 10-30A Metallic**

Metallic Plugs, Connectors, Receptacles and Reverse Service Female Plugs/Male Inlets.
10-30A, Maximum 600 VAC/250VDC

Female Receptacles		Reverse Service			
		Female Plugs			
				(Inlets)	
Aluminum with Box **	Cast Brass with Box **	Aluminum	Cast Brass	Aluminum w/Box FDWS-62	Cast Brass w/Box 3731
3743U-2	3763U-2	3789U-2	3789BU-2	3776U-2	3779U-2
3743U-3	3763U-3	3789U-3	3789BU-3	3776U-3	3779U-3
3743U-4	3763U-4	3789U-4	3789BU-4	3776U-4	3779U-4
3743U-5	3763U-5	3789U-5	3789BU-5	3776U-5	3779U-5
3743	3763	3789	3789B	3776	3779
3743U-1	3763U-1	3789U-1	3789BU-1	3776U-1	3779U-1
3753	3773	3809 ¹	3809B ¹	3796 ²	3799 ³
3744	3764	3790	3790B	3777	3780
3744	3764	3790	3790B	3777	3780
3754	3774	3810	3810B	3797	3800
3754	3774	3810	3810B	3797	3800

** Receptacles come with the following boxes:

Material	Amperes	Box
Aluminum	10, 15 & 20 30	FSWS-62 FDWS-62
Brass	10, 15 & 20 30	3721 3731

1 Also in plastic. Use 3809P or 9F33UO

2 Also in plastic. Use 3796P – Aluminum back box (use 3797-P for brass)

3 Also in plastic. Use 3799P (Brass J-Box) or 9B33UØF (w/o J-Box)

Notes:

- For 20/30A thermoplastic devices, see DuraGard section.
- Mating with DuraGard Line
 - 20A devices will mate and lock across lines.
 - 30A metal male devices cannot mate to DuraGard 30A female devices can be mixed.

For NEMA style (bladed) Convenience Receptacles, see page H62.

Thomas & Betts